

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

REVISIONS

REV	DESCRIPTION	DIN
E	ADJUST SENSOR HEIGHT TO CORRECTLY DEPICT SENSOR	40033


18893

ELECTRICAL CONNECTOR
10-32 UNF - 2A

2 MODEL 060A14
CLAMP NUT 14mm HEX
ST STL (SUPPLIED)

M14x1.25 - 6g

MODEL 065A37
SEAL .025 [.64] THICK
BRASS (SUPPLIED)

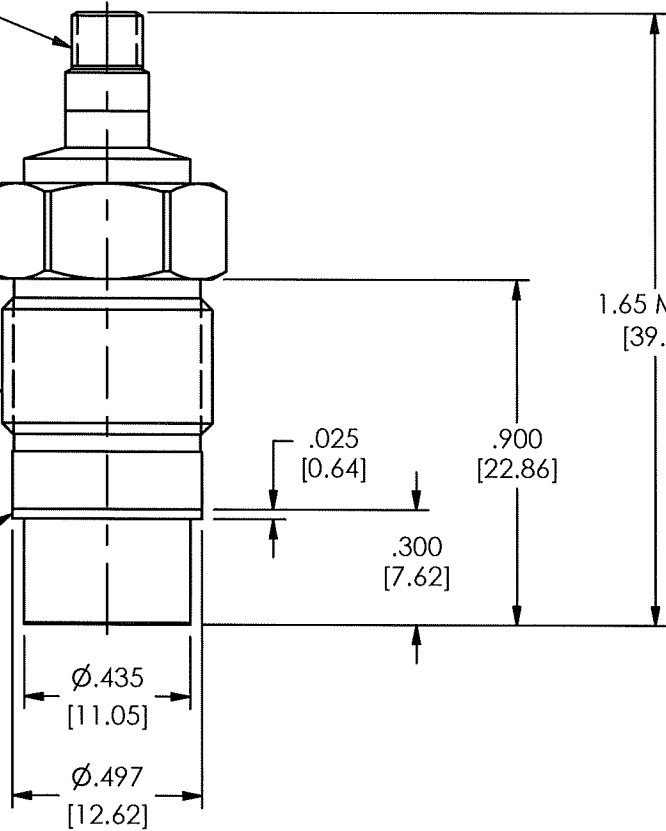


MOUNTING HOLE PREPARATION
Ø.437±.001 [11.10±.025] THRU
└─┘ Ø.500 [12.07] ▽ .600 [15.24]
M14 x 1.25-6H ▽ .450 [11.43]

1

.002
A

.005 A

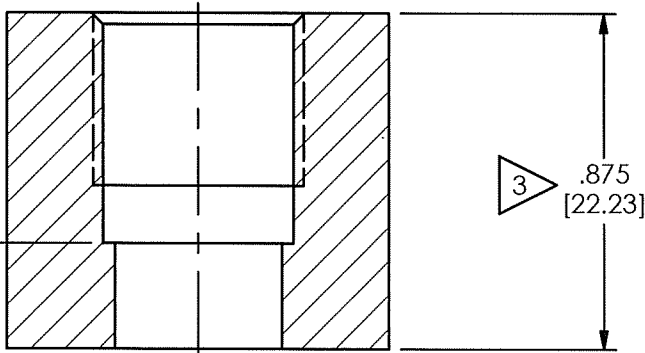

3 .875
[22.23]

- 3 DIMENSIONS SHOWN ARE FOR .875[22.23] THICK WALL. COUNTERBORE FOR THICKER WALLS.
- 2 RECOMMENDED MOUNTING TORQUE ON A 14mm HEX: 5-6 FT LBS [7-8 NEWTON METERS]
- 1 SEAL SURFACE MUST BE FREE OF TOOL MARKS WITH A MINIMUM ⁶³√

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER	
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	ECB	10/1/12	ECB	10/1/12	RF	9/24/12
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ± 0.3 XX ± 0.13	TITLE INSTALLATION DRAWING MODEL M106B PRESSURE SENSOR					
ANGLES ± 2 DEGREES	ANGLES ± 2 DEGREES						
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13	CODE IDENT. NO. 52681		DWG. NO. 18893			
		SCALE: 2X		SHEET 1 OF 1			

PCB PIEZOTRONICS[™]

3425 WALDEN AVE. DEPEW, NY 14043
(716) 684-0001 E-MAIL: sales@pcb.com